



# Tote Bag with Rope Handles

Design & work: Mioko Sugino

Size: 30cm (l) 40cm (w - opening) 10cm (d)

have fun with KOKKA fabric! produced by **KOKKA**

[kokka-fabric.com](http://kokka-fabric.com)

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment.  
Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.




## Materials

- Fabric (Outer fabric): 110cm wide x 50cm (Lining fabric a (canvas)): 90cm x 50cm (Lining fabric b (canvas)): 30cm x 50cm
- Fusible interfacing: 80cm x 10cm
- Rope: 1.4m (0.8cm diameter)
- Grommet: 8 pairs (1.0cm inside diameter)
- Button: 2 pairs (1.5cm diameter)

Fabric shown for this sample: naniIRO Bed Grass · · · Cozy JG10321 (A) matama

## Pattern and Cutting Layout


All measurements are in centimeters (cm). Add 1cm seam when cutting the fabric.

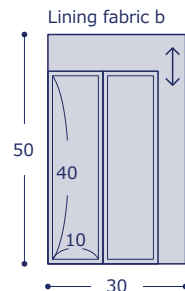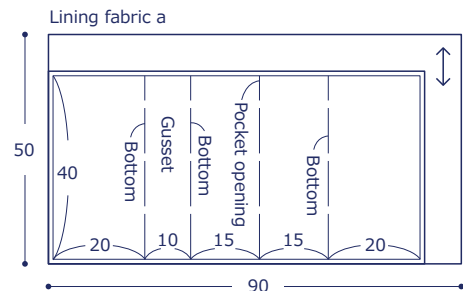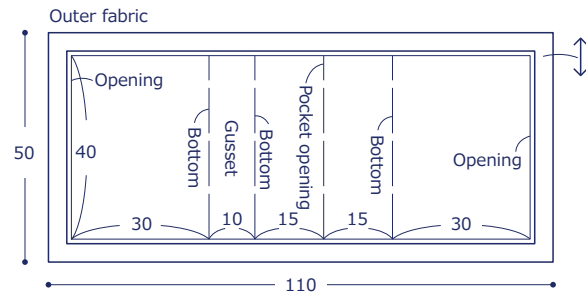


## Instructions

### 1. Make the outer bag.


① Adhere fusible interfacing to the outer fabric.

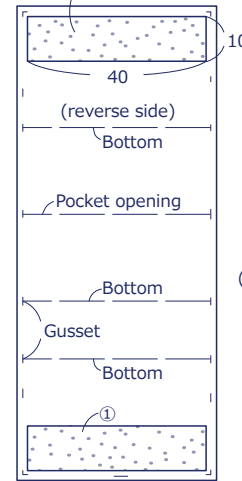


② With the front sides facing outside, fold the fabric and sew the pocket opening.

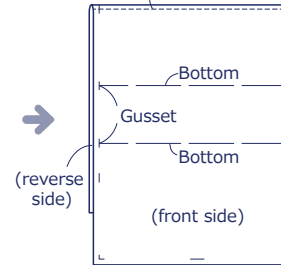


③ Fold the bottom and sew the pocket. (you may align the pocket along the fabric's pattern)

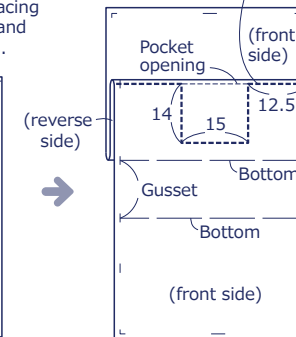

④ With the front sides facing each other, fold in half and sew both ends.

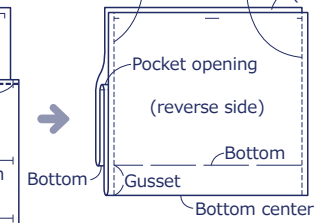


⑤ Fold the bottom corners to a triangle and sew the gusset.



⑥ Cut off the excess and serge the seam. \*Make another gusset on the other side.

### 2. Make the lining bag.


① With the front sides facing each other, sew together a and b. Press the seam open.

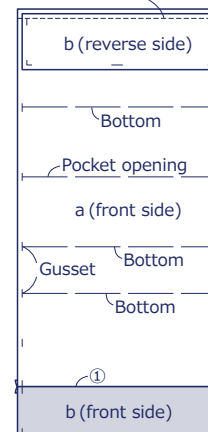

② Repeat the process as in ①②~⑥.

### 3. Sew together the outer bag and lining bag.


① Fold the opening of both outer bag and lining bag. With the front sides facing outside, sew together the bags. (Avoid overlapping the pocket side)

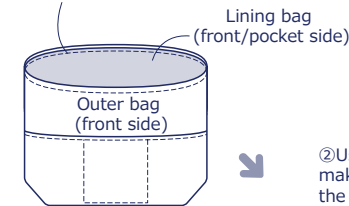

③ Put the rope (70cm each) through and tie the end. (To prevent it from fraying, apply glue or anti-fray at the knot)



② Using a hole punch, make holes and attach the grommet.

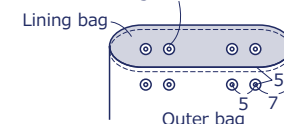

④ Attach the buttons.