



Raglan Sleeve Blouse

Design & work created by KOKKA Fabric

Size: Medium


Materials

- Fabric: 160cm (110cm wide)
- Fusible Interfacing: 40cm (90cm wide)

Fabric shown for this sample: Geometry of the Nordic 2 P30300-302 (B)

Cutting Layout


All measurements are in centimeters (cm). Numbers in () denote seam allowance. Add the seam allowance when you cut the fabric. All seam allowances 1cm unless otherwise stated. The fabric is cut sideways to align with the direction of flying swallows.

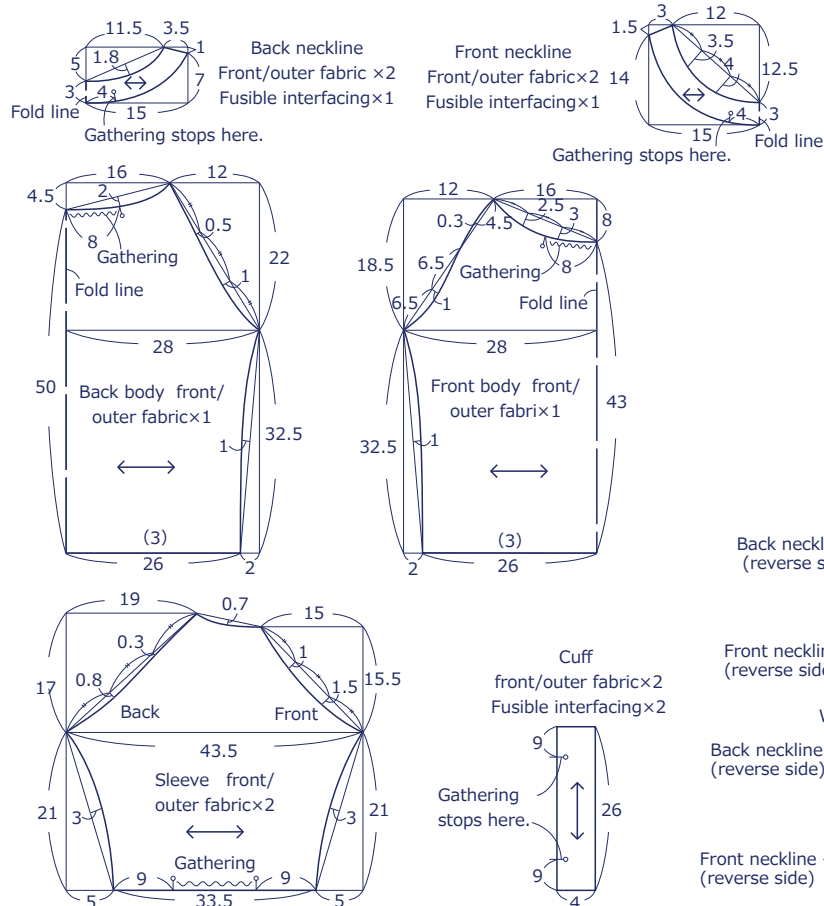


Instructions

1. Adhere interfacing to the reverse side of both front and back neckline and cuff.

2. Run rough stitches at the cuff opening.




3. With front/outer sides facing each other, sew together the sleeve and bodies.

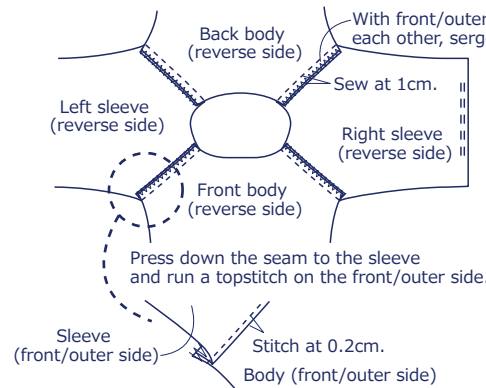


4. Prepare the neckline.

With front/outer sides facing each other, sew together the shoulder part of the front and back neckline.

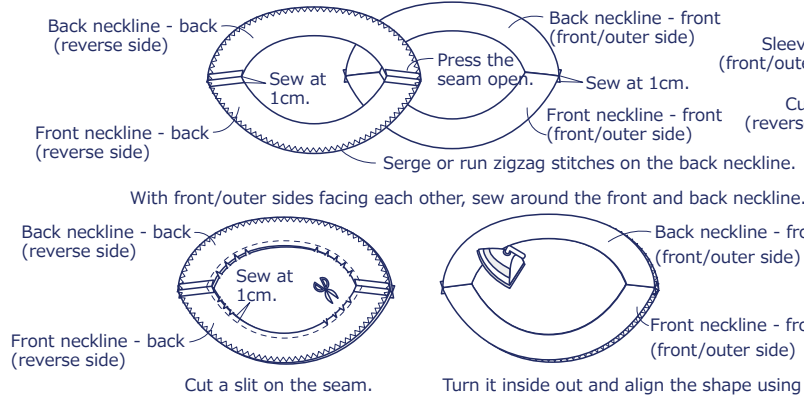


5. Attach the neckline.

Run rough stitches at the top of front and back body's neckline.




With front/outer sides facing each other, sew together the bodies and front neckline at 1cm. Turn the back neckline inside and run stitches on the front side.

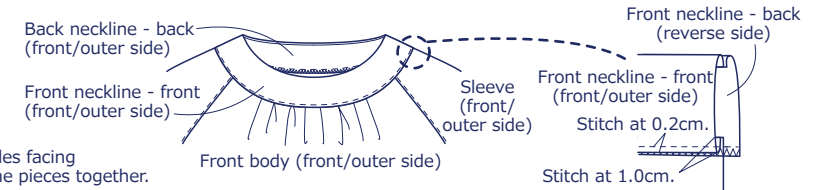


6. Sew side seams from underarms to cuff.

Run rough stitches at the top of front and back body's neckline.

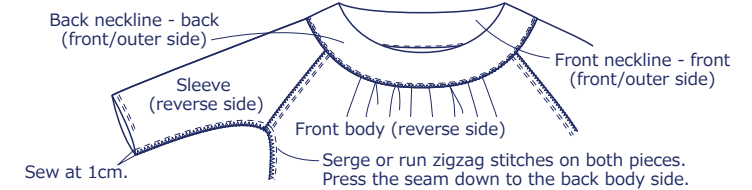

7. Sew the cuff.

Iron the cuffs to score. Open them and sew with the front/outer sides facing each other.

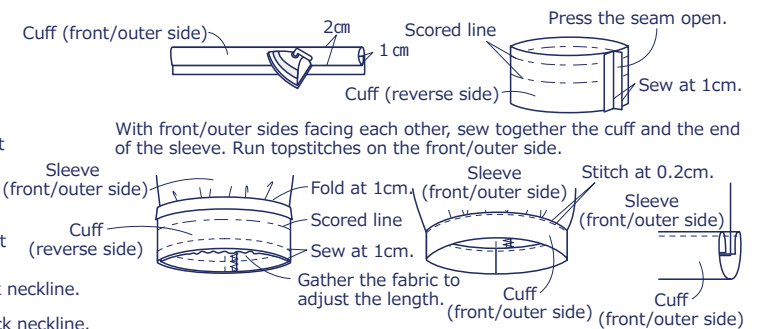

8. Double fold the hem and run topstitches to finish.

