



# Kitty's Bucket Shaped Organizer Bag

Design & work: Kanae Nakayama

Size: 17.5cm (h) 11.5cm (bottom diameter)

© 1976, 2014 SANRIO CO., LTD. @ APPROVAL No.S554665

### Materials (For one bag, A-Pink, B-Yellow)

□ Fabric (Main panel outer fabric - top, Bottom lining fabric ) : 60cm×20cm

(Main panel outer fabric – bottom, Bottom outer fabric

A – Green and white stripe B – Chartreuse and white polka dot):  $40 \text{cm} \times 20 \text{cm}$  (Main panel lining fabric A – Pink and white gingham check quilting

B - Yellow and white stripe):40cm×20cm

 $\hfill\Box$  Fusible quilt batting: A 20cm  $\times$  20cm B 40cm  $\times$  40cm


□ Leather strap: 1cm×25cm

□ Double sided rivet: Two pairs (0.7cm diameter)


Fabric shown for this sample: (Main panel outer fabric - top, Bottom lining fabric) Pink G50171-1 (B), Yellow G50171-1 (C)


### Pattern and Cutting Lavout

The unit is cm. Add 1cm seam allowance.



Check the pattern location and balance when cutting main panel fabric (top) and bottom lining fabric.





Attach a fusible quilt batting (no seam) on the back of the B Main panel lining fabric.


## kokka-fabric.com

### Instructions

2. Make the lining bag. 1. Make the outer bag. 2 Stay stitch on the seam of ①With front sides facing each other, ③With front sides facing main panel fabric (A only.) piece together top and bottom of each other, sew both side \* Make two pieces Main panel fabric main panel fabrics. edges of main panel fabrics. (front side) Main panel fabric Main panel fabric Main panel fabric (reverse side) (reverse side) (front side) Opening for turning 6 (front side) ③With front sides facing each other. sew both side edges Bottom (front side) **Bottom** Bottom of main panel fabrics (reverse side) (leaving an opening (reverse side) for turning on one side.) 2) Press down the seam and run top stitches. \*Make two pieces. Paying attention to the Sew together the ①Adhere fusible quilt batting direction of the bottom piece, pieces. Stitch it from (no seam) to the bottom. pin and cut a slit on the main the top (main panel) side. panel and bottom with front

### 3. Piece together the outer bag and lining bag.

(reverse side)

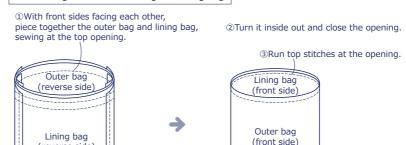

sides facing each other.

#### 4. Attach the handle.

4 As in Step 1-4 and 5,

sew together the pieces.

①Using a leather punch, punch a hole on both ends of the leather strap.

