Box Tissue Case

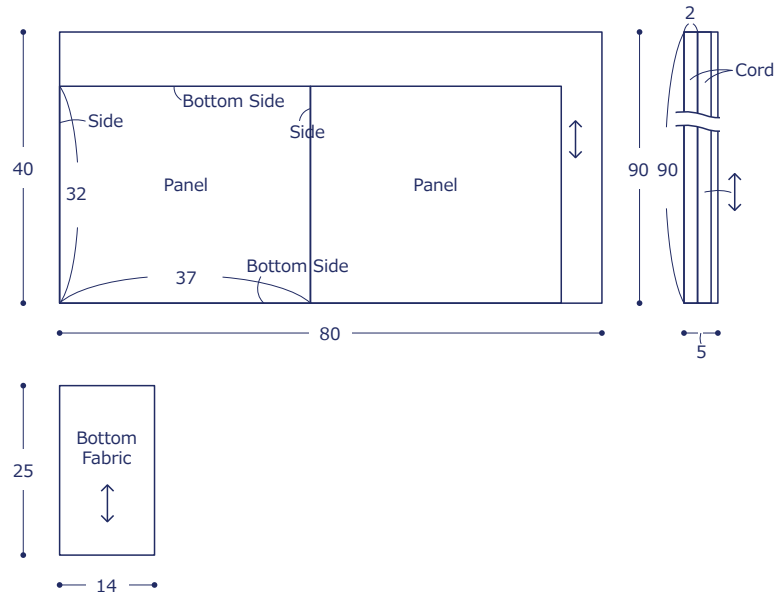Design & work: Mioko Sugino

Size: 15cm(l) 23cm(w) 12cm(d)

Materials

☐ Fabric (Panel): 80cm×40cm
  (Bottom Fabric (Canvas)): 14cmx25cm
  (Cord): 5cmx90cm

Fabric shown for this sample: EKX-126-1C

## Pattern and Cutting Layout

Unit: cm. All raw edge.

Side
Bottom Side
Side
40
32
Panel
Panel
37
Bottom Side
80
2
Cord
90 90
5
Bottom Fabric
25
14

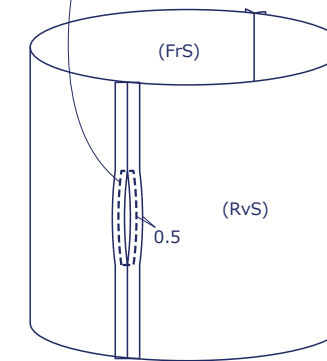## Instructions   Front Side - (FrS), Reverse Side (RvS)

1. Make the panel

①With the front sides facing each other, align the top and bottom pattern directions. Sew together at the sides, leaving an opening for the cord.

(FrS)
1
(RvS)
1
4
Center→
4
Cord opening
Cord opening
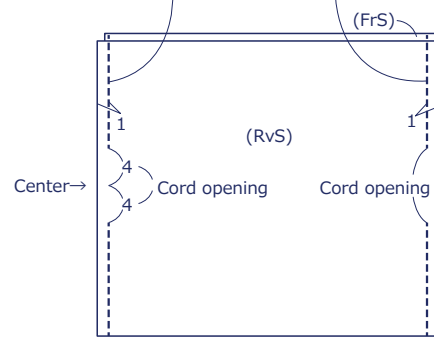
②Press the seam from ① open. Apply stitches around the cord opening.
· Make two openings.

(FrS)
(RvS)
0.5

③With the front sides facing outside, fold in half and apply stitches around the top opening.

Outer side (FrS)
2   2
Side
Side
Lining side (FrS)
6   6   0.7
Be mindful of the pattern direction
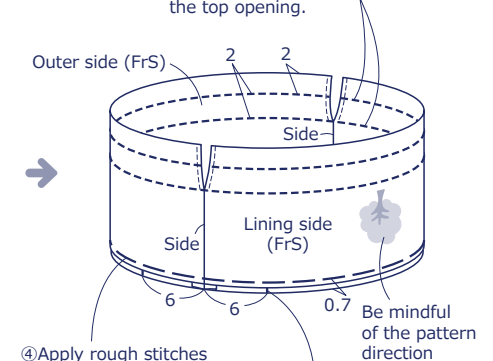
④Apply rough stitches on the bottom side.
⑤Cut a slit.
· Repeat the same process on the other side.

2. Attach the bottom fabric

Panel lining side.
Align the slit on the panel and bottom corner.
Bottom fabric (RvS)
Panel outer side
1
①With the front sides facing each other, sew together the outer panel and bottom fabric.
②Apply zigzag stitches on the seam.
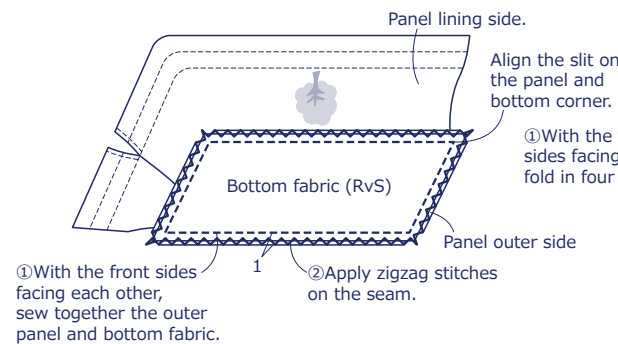
3. Make the cord and insert

(RvS)
(FrS)
0.2
0.5
· Make two pieces.

How to insert the cord
Cord
Cord opening
Panel outer side
①With the front sides facing outside, fold in four and sew.
②Turn the outer panel inside out.
③Insert the cord in an alternate manner and tie the ends.