Vest With Side Ribbons

2

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Design & Work: Kokka Fabric

Size: M

Body Length: about 82.5cm

Materials

- □ Outer Fabric: about 100cm wide x 200cm
- ☐ Fusible Interfacing (light weight): about 90cm wide x 20cm
- ☐ Button: about 11.5mm wide x One piece

Fabric shown for this sample: YPA-56000-2A

Pattern

Unit: cm. [] denotes seam allowance.

Add 1cm seam when cutting the fabric unless specified otherwise.

Neckline Bias Binding Fabric
Outer Fabric x 1 [raw edge measurement]


60

Loop
Outer Fabric x 1
[raw edge measurement]

Armhole Bias Binding Fabric
Outer Fabric × 2 [raw edge measurement]

75

Xif the length of the bias binding fabric is short, use two pieces.

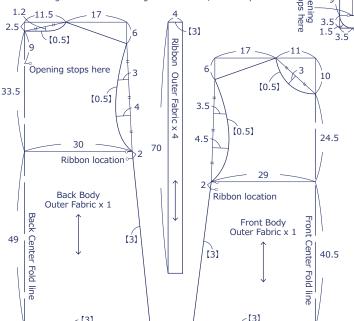

*Adhere fusible interfacing on the back of the back facing

Instructions Front Side - (FrS), Reverse Side - (RvS)

1. Make the loop and baste it to the back body

Fold in four and apply stitches.

0.2cm wide stitch

Loop (FrS)

Fold in half and baste it to the back body.

Back center


0.5cm

Baste at

(FrS)

Loop (FrS)

3. With the front sides facing each other, sew together the front body and back body at the shoulder



5. Finish the neckline

Back Facing

Outer Fabric x 1

Fusible Interfacing x 1

3.5 3.5

[0.5]

With the front sides facingeach other, sew together the neckline and bias binding fabric for the neckline.

Neckline bias binding fabric (FrS)

Neckline bias binding fabric (FrS)

Fold 1cm

Fold 1cm

Fold line fold line from body (FrS)


b

*Cut off excess bias binding fabric.


Press down the neckline bias binding fabric to the lining side and apply stitches.

Back body (RvS) 0.2cm wide stitch wide stitch Front body (FrS) (FrS)

7. Fold the hem in three and apply stitches



9. Fold the side in three, place the ribbon in-between and apply stitches

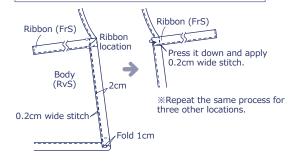

2. Finish the seam of back facing, and sew up to where the opening stops on the back body

With the front sides facing Turn it over and apply back facing each other, sew together stitches. the back body and back facing. Back facing Back facing (RvS) (FrS) Back center Back body Back body (FrS)_{9.5cm} Sew at 0.5cm -0.2cm wide stitch ng he Back facing (RvS) Opening stops here

4. With the front sides facing outside, fold the bias binding fabric in half.



6. Finish the armhole

With the front sides facing each other, sew together the armhole and bias binding fabric for the armhole.


Back body
(FrS)
Fold line

Front body
(FrS)

Armhole
bias binding
fabric
(FrS)

**Cut off excess bias binding fabric.

Press down the armhole bias binding fabric to the lining side and apply stitches.



※Repeat the same process on the other side.

8. Fold the cord in four and apply stitches



10. Attach the button on the back body to finish

