



Pouch with Frills

Design & work: Satomi Takei

Size: approx. 14cm (l) approx. 21cm (w)

have fun with KOKKA fabric! produced by KOKKA

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Materials


- Fabric (Outer Fabric, Frill): 30cm x 90cm
- Fabric (Lining Fabric (#11 Canvas)): 50cm x 20cm
- Fusible Interfacing: 50cm x 20cm
- Zipper: 20cm x one piece

Fabric shown for this sample: EGXA-6426-1A

Pattern and Cutting Layout

Unit: cm. All raw edge.


Adhere fusible interfacing on the back of the outer fabric indicated with . Cut the lining fabric in the same manner as the outer fabric.

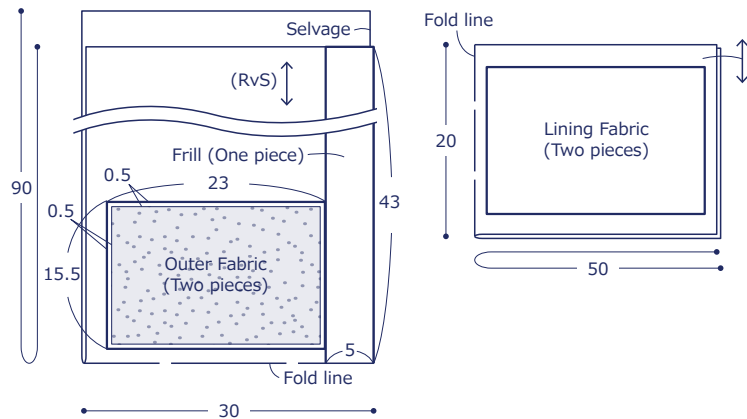

Instructions Front Side - (FrS), Reverse Side (RvS)


1. Make the frill

②Apply rough stitches on the attachment side.

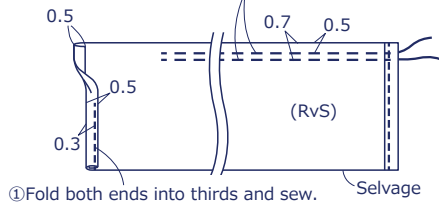


3. Finish the pouch

①With the front sides facing each other, sew together the outer fabric and lining fabric, leaving an opening for turning (leave the zipper open).

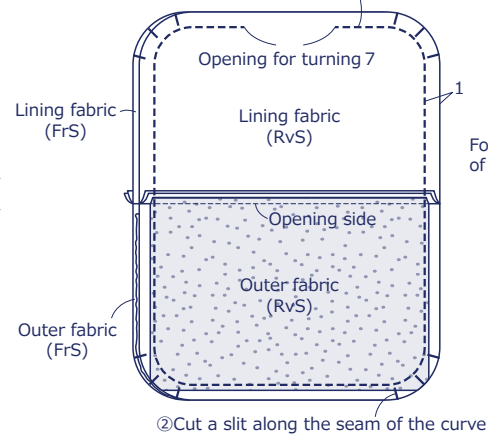


②Cut a slit along the seam of the curve.

③urn it inside out, close the opening and align the shape.

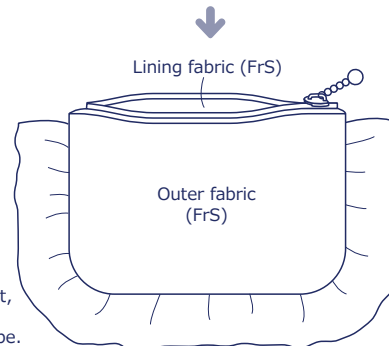


2. Make the body

①Mark the curve on the bottom corner and cut the fabric.

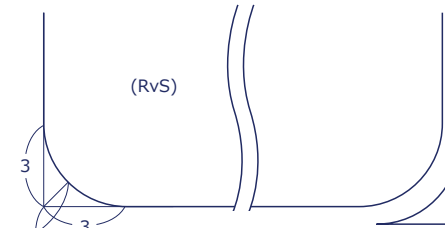



• Repeat the process for two pieces each of outer fabrics and lining fabrics.

③With the front sides facing each other, baste the zipper. (Align the center of the zipper and opening side of the outer fabric.)

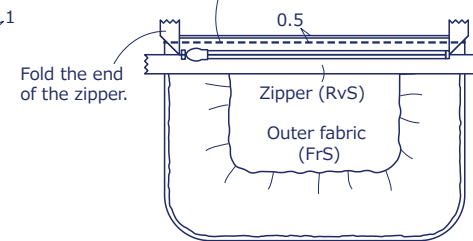


Fold the end of the zipper.

⑤ With the front sides facing outside, put together the outer fabric and lining fabric and apply stitches.

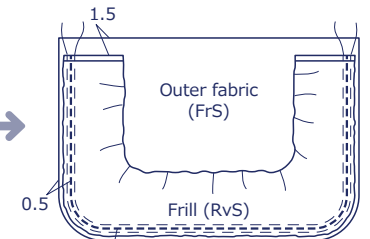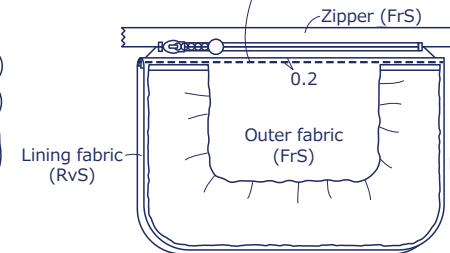

②With the front sides facing each other, place the frill matching the attachment measurement. Pull the thread from ① - ②, and baste the piece.

④With the front sides facing each other, sew together the lining fabrics.

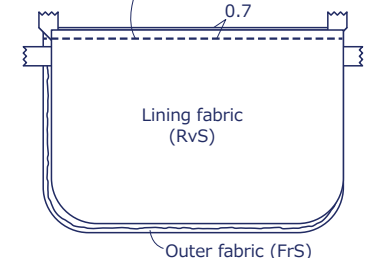

⑥Repeat the same process for the other side of the zipper using steps ③~⑤.

