

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.



Jumper Skirt

Design & Work: Yoko Kato

Size: Length from the top of the chest panel (bib) to hem:
Medium 106cm Large 108.5cm


Materials

- Fabric: 110cm wide x 2.5m
- Elastic Tape: 3cm wide – Medium 38cm Large 41cm
- Button: 1.5cm diameter – Two pieces

Fabric shown for this sample: NC-92770-771D


Pattern & Cutting Layout

Unit: cm () denotes seam allowance Add 1cm seam allowance unless specified otherwise
Same measurements for both M and L unless specified otherwise

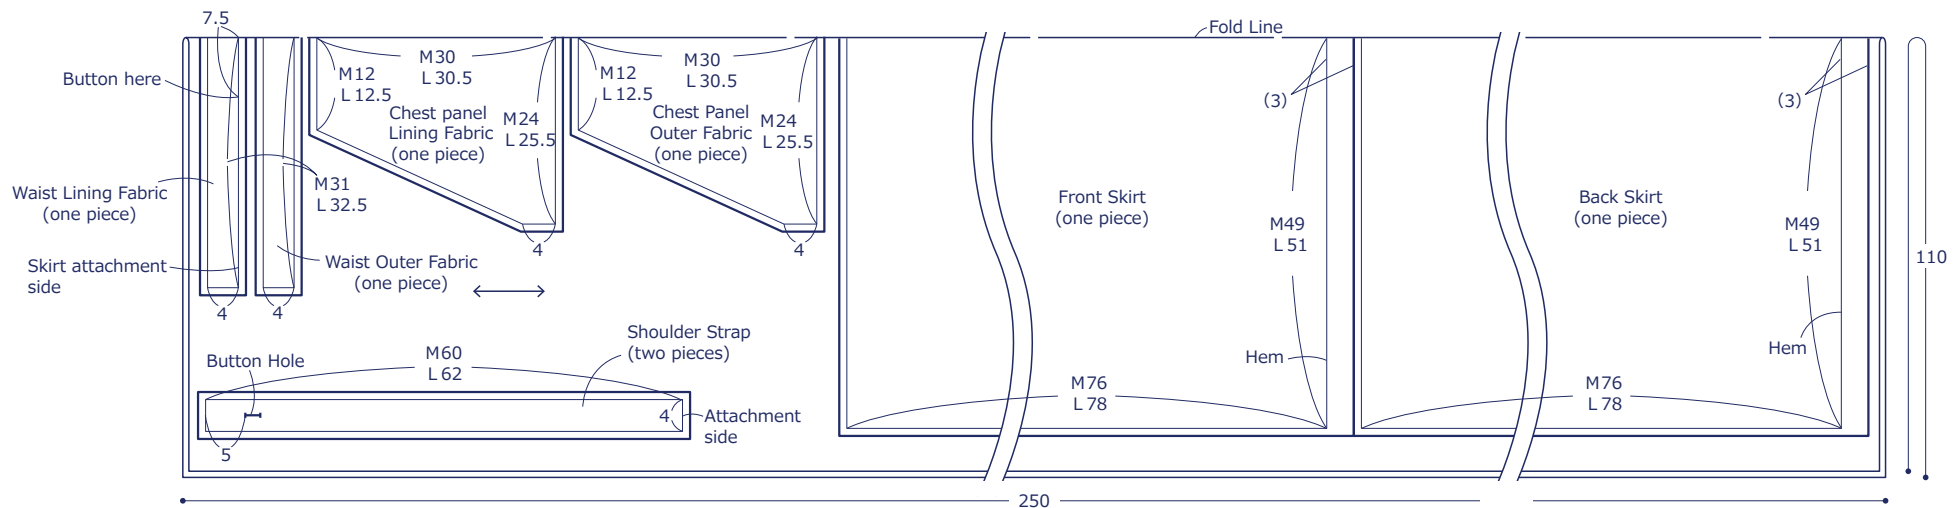


Instructions Front Side - (FrS), Reverse Side - (RvS)

Elastic tape length and button hole position are suggested only as a guide.
Try on the skirt before finalizing the length and position.

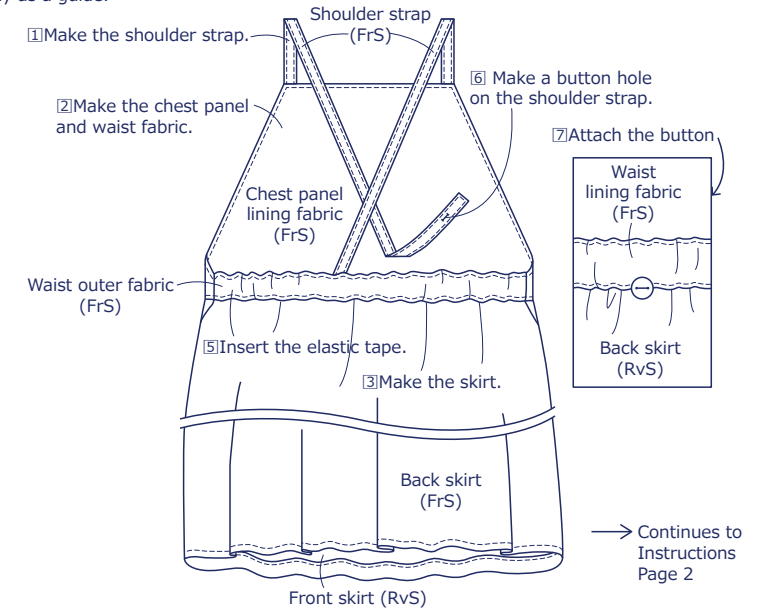

① ①Fold the seam of the other side of the attachment side first, followed by both sides.



①With the front sides facing each other, sew together the chest panel and waist fabric at both sides.

Shoulder strap

Shoulder strap

Chest panel outer fabric (FrS)

Sew to the finish measurement

Waist outer fabric (RvS)

② Press the seam open.

Chest panel outer fabric (FrS)

Waist outer fabric (RvS)

④ Make the lining fabric as in steps ① and ②.

Chest panel lining fabric (RvS)

Waist lining fabric (RvS)

⑥ Turn it over and apply stitches.

Waist outer fabric (FrS) Chest panel lining fabric (RvS)

① Insert elastic tape through waist fabric and apply backstitches two to three times.

Chest panel lining fabric (FrS)

② Secure the chest panel.

0.2

Chest panel outer fabric (FrS)

1

Elastic tape

Front skirt (FrS)

Back skirt (FrS)

Waist outer fabric (FrS)

② Press the chest panel fabric and seal.

Diagram illustrating the construction of the waistband and chest panel for a skirt. The diagram shows the waistband with labels for 'Waist outer fabric (RvS)', 'Waist lining fabric (FrS)', and 'Back skirt (FrS)'. It also shows the 'Chest panel outer fabric (FrS)' and 'Front skirt (RvS)'. A note on the right says 'Fold the seam of the attachment side of the chest panel and waist lining fabric and leave unsewn.'



Diagram illustrating the construction of a skirt waistband. The waistband is shown with a seam allowance of 0.2 cm. The waistband is labeled "Waist lining fabric (FrS)" and "Sew up to here". The outer fabric is labeled "Outer fabric (FrS)". The back skirt piece is labeled "Back skirt (FrS)" and the front skirt piece is labeled "Front skirt (FrS)". The waistband is shown with a seam allowance of 0.2 cm. The waistband is labeled "Waist lining fabric (FrS)" and "Sew up to here". The outer fabric is labeled "Outer fabric (FrS)". The back skirt piece is labeled "Back skirt (FrS)" and the front skirt piece is labeled "Front skirt (FrS)".