



Flat Round Pouch

Design & work: Satomi Takei

Size: 12cm (diameter)


Materials

- Fabric: 40cm x 15cm
- Fusible Interfacing: 30cm x 15cm
- Quilt Batting: 10cm x 10cm
- Double-Folded Bias Binding Tape: 1.2cm wide x 40cm
- Coiled Zipper: 20cm x One piece

Fabric shown for this sample: EGX-9900-1A

Pattern and Cutting Layout


Unit: cm. All raw edge.

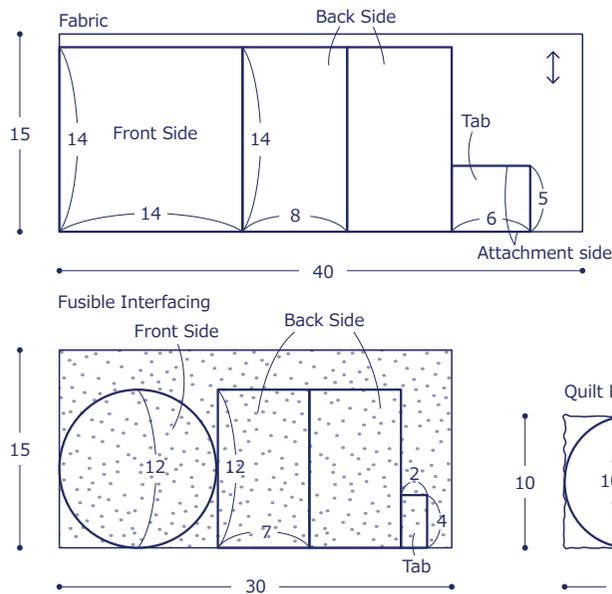


The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Instructions Front Side - (FrS), Reverse Side (RvS)

1. Adhere fusible interfacing

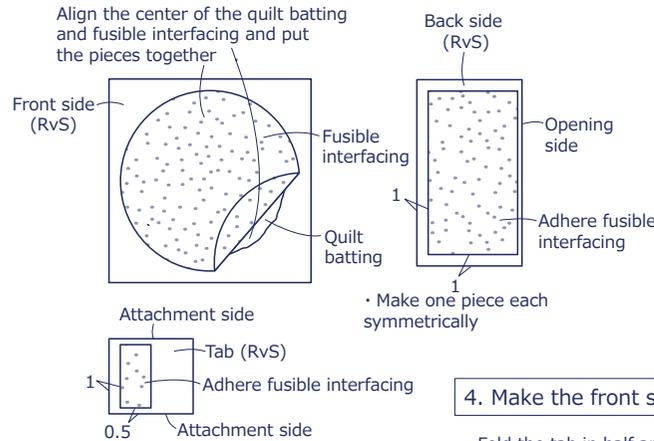


2. Make the back side

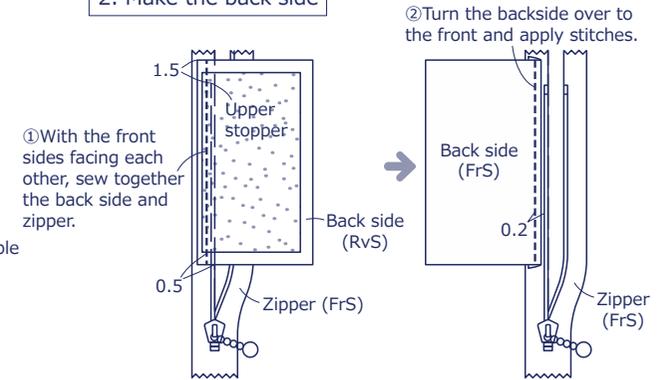


4. Make the front side

Fold the tab in half and baste.

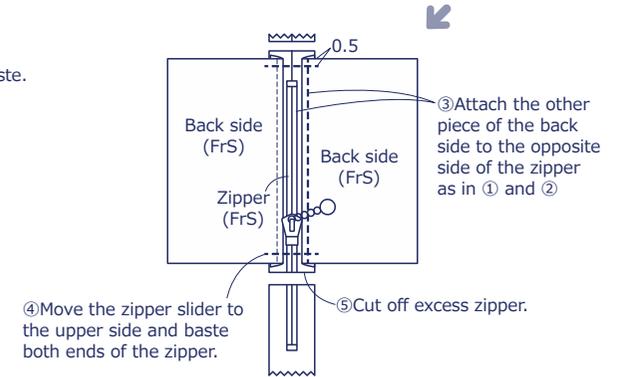


3. Make the tab

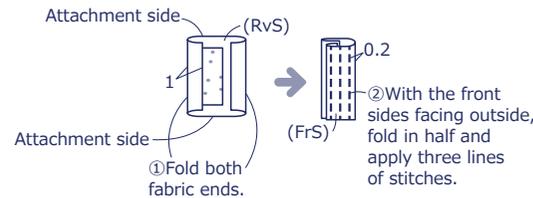

5. Finish the pouch

① With the front sides facing each other, put together the front side and back side and sew along the edge of the fusible interfacing of the front side (leave the zipper open halfway).

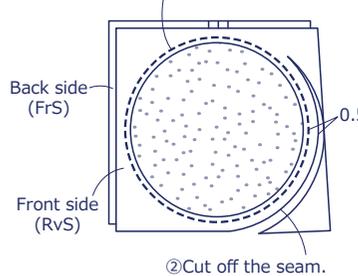

③ Open one side of the bias binding tape. With the front sides facing each other, put it together with the back side and sew along the fold line of the bias binding tape.

