



Body Length: approx.. 118.5cm

- Outer Fabric: approx. 110cm wide x 300cm
- Fusible Interfacing (light weight): approx. 90cm wide x 30cm

Fabric shown for this sample: YPA-71050-2A

When cutting the fabric, add 1cm seam allowance unless otherwise specified.




Instructions Front Side - (FrS), Reverse Side (RvS)


1. Make the front opening

①Cut a slit in the front center of the front body.

②Fold the strip to the finished measurement.

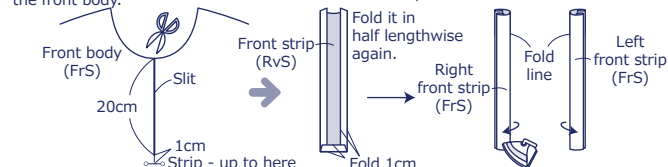


③Open the fold and cut as shown.

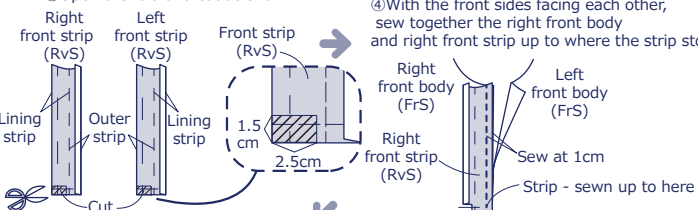

⑤ With the front sides facing each other, sew together the left front body and left front strip up to where the strip stops.

⑥Fold the right front strip to the finished width, sandwiching the seam allowance of the body, and stitch it in place, keeping the left front body out of the way.

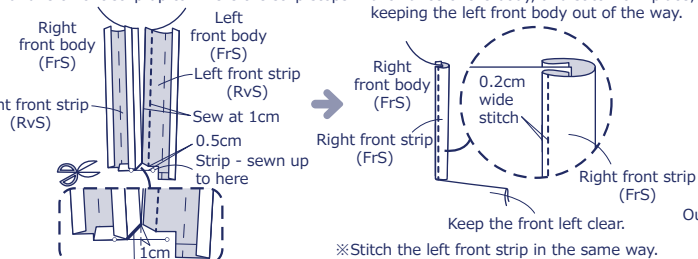


Make diagonal cuts only in the seam allowances of the bodies.

⑦ Place the right front strip face up, stack the left and right strips on top of each other, and stitch along the bottom edge.


2. Finish the hem

Fold it into thirds and sew it together.

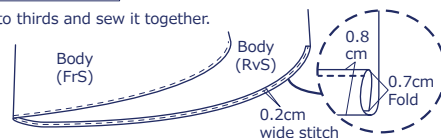

3. Attach the yoke


①Fold the tucks of the back body and baste.

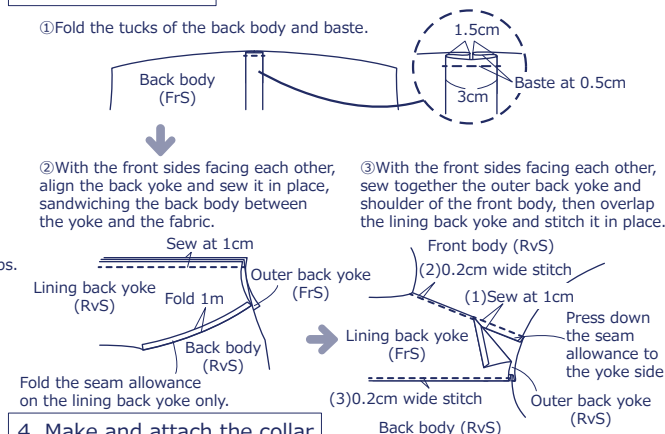

4. Make and attach the collar

①With the front sides facing each other, sew together the outer collar and lining collar, leaving a 1-centimeter gap at each end.

②Trim the seam allowance to 0.5 cm.

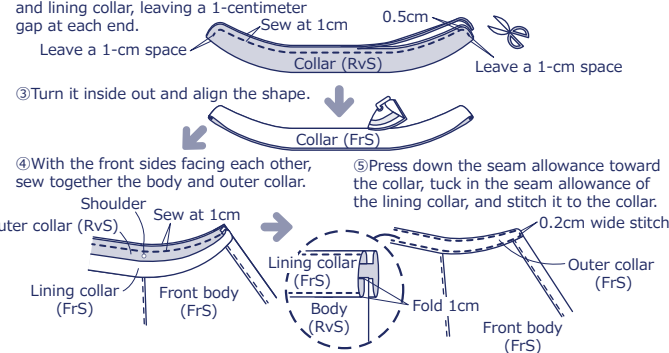

5. Attach the sleeves, sew from the underarm to the side seam, fold the cuff over three times, and stitch it in place to finish

