



Gathered "Cashe coeur" Bag

Finished Measurement : 45cm(W) x 46cm(L), Handle 55cm(L)
making by Junko Kato

have fun with kokka fabric!

produced by **KOKKA**


kokka-fabric.com

Materials

- Fabric 110cm(W) x 100cm(L)
- Interfacing 100cm(W) x 65cm(L)
- Double-folded bias tape 11mm(W) x 100cm(L)
- Tyrolean Trim 1.7cm(W) x 360cm(L)

Fabric shown for this sample : KOKKA nunokawa (Frog) f-102 d/#2


Cutting Layout

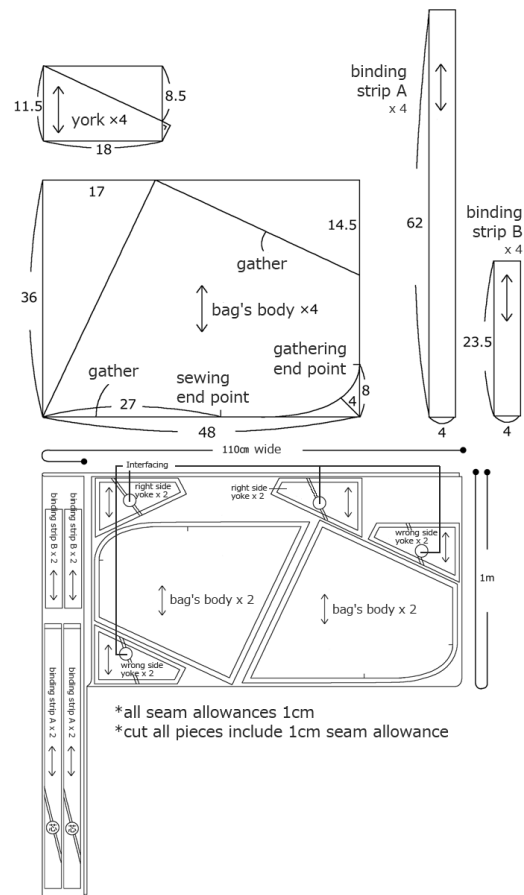

Instructions


Preparation

- After cutting fabric, iron on the interfacing to each right side yoke, wrong side yoke, and binding strips(A).
- Face right sides of binding strips (A) with each other, place binding stripes lengthwise and seam together.




Step 1. Sewing the bag's body and yokes


- Sew running stitches 0.5cm from the edge and pull carefully the thread to gather.



- Sandwich the main panel between the right side yoke and wrong side yoke, and then sew with a machine.

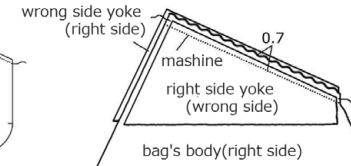


- Flip over both yokes then press flat. Sew stitches 0.2cm from the right side yoke.

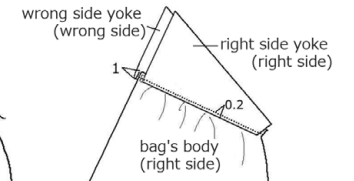


Step 2. Binding



- Fold each binding strip in half to mark the center, and fold outer edges in to meet the center crease.




- Face the binding strip (B) and right side yoke with each other, and then sew with a machine.



- Flip over the binding strip (B). Place the Tyrolean trim in the center of the binding strip. Apply with edge-stitches with a machine.

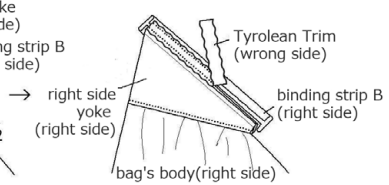


- Sew the binding strip (A) on the main panels in the same ways as shown in the diagram.

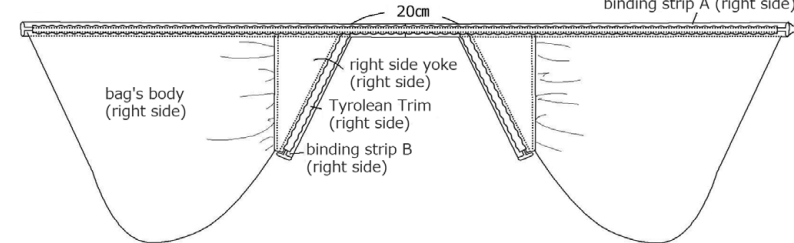


Step 3. Overlapping the front edges

- Overlap the front edges. Sew with a machine to the meet the end point along the bottom of the bag.

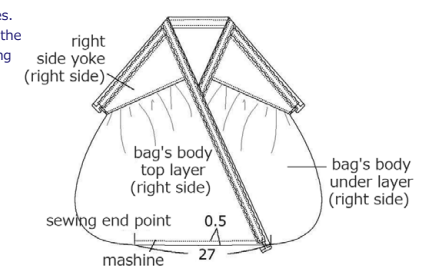


Step 4. Gathering

- Sew running stitch between gathering end points, and then pull the threads to gather to 45cm.




Step 5. Sewing around the bag's body

- Turn out the bag's body. With right sides together, sew stitches 1cm seam along the body.



Step 6. Bias binding

- Bind the seam allowance with bias tape.

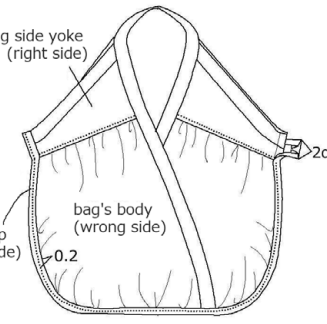

Step 7. Finishing