Dress with Frilled Sleeves

Design & work: Kokka Fabric

Size: Length about 110cm

Instructions

With the front sides facing each other, sew together the front body

and outer back yoke. Layer the lining back yoke and apply stitches.

0.2cm wide

stitch on the neckline-

0.2cm wide stitch

Lining back yoke

(FrS)

0.2cm wide stitch

Back body (RvS)

Front facing

(FrS)

Front body

(RvS)

Press down the seam

to yoke side.


Outer back yoke (RvS)

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.


Front Side - (FrS), Reverse Side (RvS) 1. With the front sides facing each other, put together 4. Make the frills the front body and front facing and sew around the neckline Bring the seam to the center and fold With the front sides facing each both long ends. Sew one short end. Finish the seam ②1cmで縫う ③ Make a notch on the seam. other, fold the frill piece and sew. Sew at 1cm. Frill (RvS) of the front facing Sew at 1cm. Frill (RvS) Fold line Front bod (FrS) (RvS) Turn it over. Turn it over and gather Align the the piece to the center. Frill (FrS) ront bod ont facing (RvS) (FrS) Frill (RvS) 2. Gather the fabric on the back body Gathering up to here 5. Make the sleeve and attach the frill Gathering up to here Attach the frill to the sleeve. Back body (FrS) Fold the cuff in three and apply stitches. 3. With the front sides facing each other, put together the back voke and sew the neckline. Sew the piece together Sleeve Frill with the back body. (RvS) Sleeve (FrS) (FrS) 3 Make a notch on the seam. 0.2cm wide stitch. ① Fold 1cm. Sew at 1cm. Fold 1cm. Fold 1cm. 2cm Lining back voke (RvS) Align the fill position and center 1 Fold 1cm. Outer back yoke (FrS) 6. Attach the sleeve and sew of the frills and sew together. Turn it over. along the bottom of the sleeve * Remove the rough stitch thread. Align the shape. and sides Lining back voke (FrS) Lining back yoke (FrS) Front body (RvS) Back body (RvS) Sleeve Outer back yoke (RvS) Sew at 1cm. 2 Finish the seams (RvS) together and press ① Sew at 1cm. it down to the body side. 3 Sew at 1cm. Back body (FrS) Lining back yoke (FrS) Lining back yoke (RvS) Sleeve Body 4 Finish the seams (RvS)

Materials

- □ Outer fabric about 110cm wide x 220cm
- ☐ Fusible interfacing (light weight) about 110cm wide x 30cm

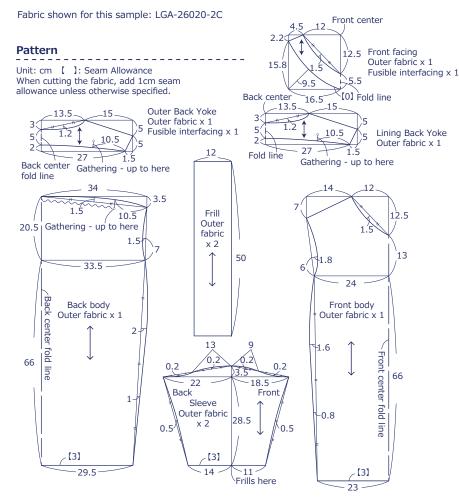

* Adhere fusible interfacing on the back of the front facing and outer back yoke.



7. Fold the hem in three and apply stitches to finish

(RvS)

together and press it

down to the back

body side.