Kid's Dress

kokka-fabric.com

Instructions Front Side - (FrS), Reverse Side (RvS) Design & work: Kokka Fabric

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Size: 100cm

Materials


□ Outer fabric: 108cm wide x 90cm


☐ Flat elastic tape: about 6mm wide x 18cm


Fabric shown for this sample: Natural Life YRA-99000-1A


Pattern


Unit: Centimeters (cm) []: Seam allowance When cutting the fabric, add 1cm seam allowance unless specified otherwise.





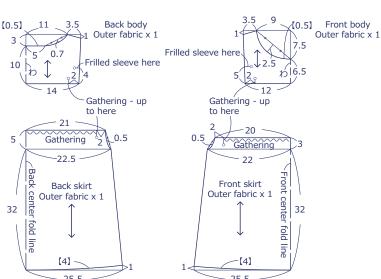






2. Sew the shoulder of the front and back bodies

With the front sides facing each other, sew together the front and back bodies at the shoulder.




3. Make the frilled sleeves and attach them to the body

With the front sides facing outside, make the gathering.



With the front sides facing each other, sew together with the body.




4. Sew the armhole of the skirt and sides

Fold the armhole in two and apply stitches. Fold for 0.5cm wide stitch 0.5cm wide stitch Front skirt Back skirt (RvS) (RvS)

With the front sides facing each other, sew together the front and back skirts.

together. Press it down to the body



5. Sew together the body and skirt

Gather the fabric at the top edge of the skirt.



Apply zigzag stitches on the seams together. Press it down to the body side an apply stitches.


6. Finish the neckline

Piece together the bias binding strips. Fold it in half with the front sides facing outside.

Bias binding strip (FrS)

Press the seam open.

Press down the bias binding strip to the back side. Apply stiches only on the back neckline.





Apply stitches in the ditch along the shoulder seam to secure flat elastic tape. Apply stitches on the front neckline.

> Align the flat elastic tape alongthe shoulder line and apply stitches in the ditch to secure.

7. Finish the hem

Fold in three and apply stitches.






With the front sides facing each other,

sew together the back body and skirt.

Sew at 1cm. Back body (FrS)

Place the bias binding strip along the neckline and sew. Front body



※ Cut off excess bias binding strip. Put the flat elastic tape

through the back neckline. Flat elastic tape 18cm Front body

