



School Bag

Design & Work: Kokka Fabric

Size: about 18cm (l)
 about 25cm (w)
 about 10cm (d)
 (excludes shoulder strap)

have fun with KOKKA fabric! produced by KOKKA

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.


Materials

- Outer Fabric: about 110cm wide x 40cm
- Lining fabric: about 110cm wide x 30cm
- Fusible interfacing (heavy weight): about 110cm wide x 30cm
- Flat Tape: 25mm wide x 120cm
- Slide Adjuster: 25mm wide x one piece
- Rectangle Buckle: 25mm wide x one piece
- Zipper: 40cm x one piece
- Bias Binding Tape: about 11mm wide x 30cm
- Piping Tape: about 10mm wide x 180cm

Fabric shown for this sample: YK-69000-2B

Pattern

Unit: cm []: Seam allowance. Add 1cm seam allowance unless specified otherwise.

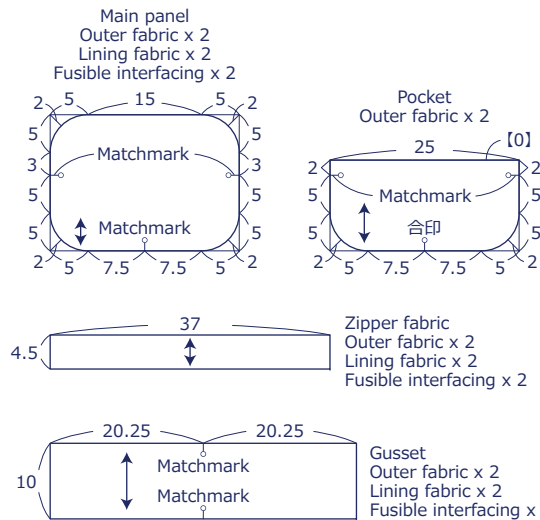


※ Adhere fusible interfacing on the back of the panel outer fabric, zipper outer fabric and gusset outer fabric.

Instructions Front Side - (FrS), Reverse Side (RvS)

1. Make the shoulder strap and baste it to the outer gusset fabric


Put the flat tape (cut to 110cm) through the slide adjuster. Fold in three and apply stitches.

Put the edge of the shoulder strap through the rectangle buckle, then through slide adjuster.

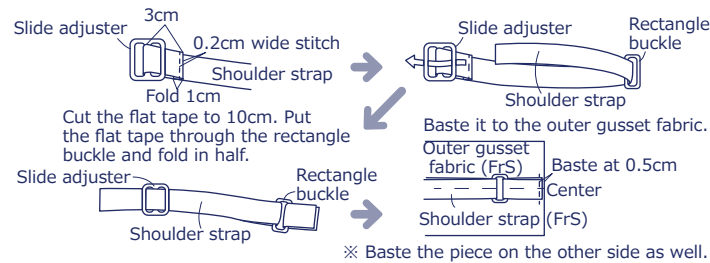

2. Attach the zipper to outer zipper fabric


Fold the seam of the zipper opening of the outer zipper fabric. Layer with the zipper and apply stitches.

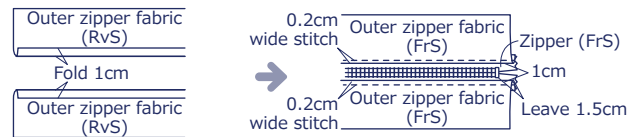

3. Sew together the outer zipper fabric and outer gusset

With the frons sides facing each other, sew together the outer zipper fabric and outer gusset fabric.


Press down the seam to the outer zipper fabric (FrS) and apply stitches.

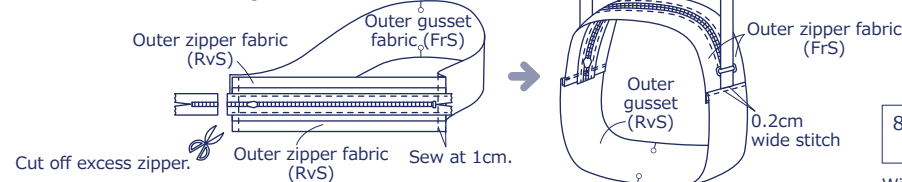

4. Sew together the lining zipper fabric and lining gusset fabric

Fold the seam of the zipper opening of the lining zipper fabric. With the front sides facing each other, sew together with the lining gusset fabric.


Press down the seam to the lining gusset side.

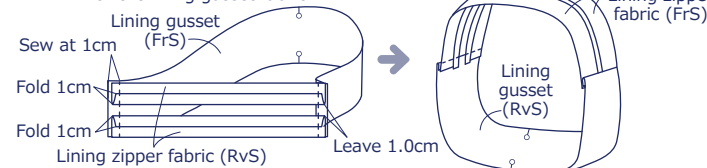


5. Make the pocket and baste it to the outer main panel

With the front sides facing outside, layer the pocket and finish the opening using the bias binding tape.

Baste it to the outer main panel.

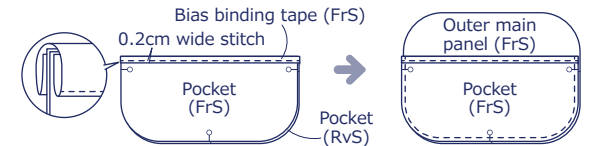


6. Baste the piping tape on the outer main panel

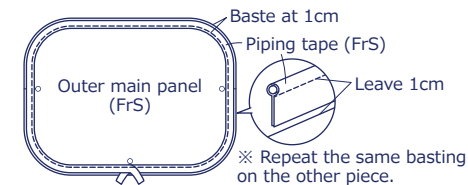

7. Sew together the main panel and gusset

Keeping the zipper open, sew together the main panel and gusset with the front sides facing each other.

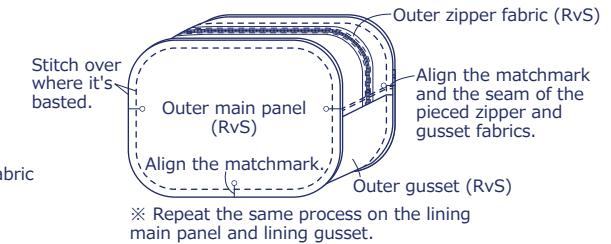

8. Attach the lining main panel to the zipper. Turn it inside out and align the shape to finish.

With the front sides facing outside, sew together the outer main panel and gusset main panel, using blind stitches.

