



# Vanity Case

Design & work: Ayumi Yatsuta

Size: 12cm (l) 16cm (Bottom-long side)  
10cm (Bottom - short side)




## Materials

- Fabric(Main Panel, Ribbon): 60cm×50cm  
(Lid, Bottom): 40cm×20cm
- Fusible Quilt Batting (heavy weight): 50cm×25cm
- Fusible Quilt Batting (light weight) : 20cm×10cm
- Fusible Interfacing: 25cm×20cm
- Double Slider Zipper: 35cm long x One piece
- Double Fold Bias Binding Tape: 2cm wide x 1.4m
- #25 Embroidery Thread

Fabric shown for this sample: (Main Panel, Ribbon) Yumekawa Mix LO-49000-2B  
(Lid, Bottom) Very Cotton LO-49010-1A

## Pattern and Cutting Layout

Unit: cm. Raw edge unless seam is specified.

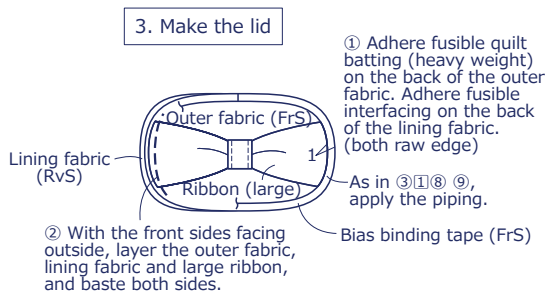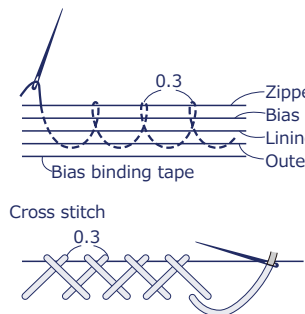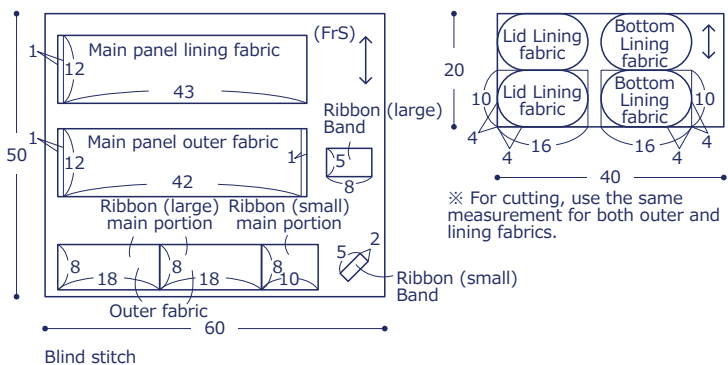

## Instructions

### 1. Make the main panel

① Adhere fusible quilt batting (heavy weight) on the back of the outer fabric excluding the seam (raw edge all around). (Leave both ends unattached for about 3cm so that it can be flipped back.)

Leave 5cm open on both sides.

② Hand quilt the outer fabric along the printed pattern.

③ With the front sides facing outside, baste the long end.

④ With front sides facing each other, fold the outer fabric in half. Sew the short end, avoiding the lining fabric.

⑤ Press the seam from ④ open.

⑥ Put the ends of the quilt batting and sew together with overseam.

⑦ Fold in the seam of short end of the lining fabric and sew with overseam.

### 2. Make the ribbon

<Large>

② Adhere fusible quilt batting (light weight) on the main portion outer fabric.

③ Adhere fusible quilt batting (light weight) on the band.

④ Fold both ends of the ③ and sew.

⑤ With the front sides facing each other, fold ④ in half and sew. Turn it inside out.

⑥ Turn over the main portion and put it through the band and secure.

⑦ With front sides facing each other, sew together the long ends of the main portion.

<Small>

① With front sides facing each other, fold the main portion in half and sew, leaving an opening for turning.

② Bring the stitch line from ① to the center and sew both ends.

③ Turn it inside out and close the opening for turning.

④ Fold the long ends of the band.

⑤ Put the band around the main portion and sew to secure.

### 3. Make the lid

① Adhere fusible quilt batting (heavy weight) on the back of the outer fabric. Adhere fusible interfacing on the back of the lining fabric. (both raw edge)

② With the front sides facing outside, layer the outer fabric, lining fabric and large ribbon, and baste both sides.

### 4. Make the bottom

Repeat the process as in ③①②. (no ribbon)

### 5. Sew together the main panel and bottom

① Align the main panel lining fabric and bottom lining fabric and sew together.

### 6. Finish the process

③ Apply overseam on the main panel and back center of the lid.

② Attach the edge of the zipper to the lining fabric using the cross stitch. (Use two strands of the embroidery thread)

① Attach the zipper using blind stitches.

④ Attach the small ribbon using overseam.