



Tiered Dress

Design & work: Yoko Kato

Size: Back length 117cm

have fun with KOKKA fabric! produced by KOKKA

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.


Materials

- Fabric (Body, Facing, Middle Skirt, Strap): 110cm wide x 1.7m
- (Top Skirt, Bottom Skirt): 110cm wide x 1.7m
- Fusible Interfacing: 40cm x 20cm

Fabric shown for this sample: (Body, Facing, Middle Skirt, Strap) NFA-1010-12A
(Top Skirt, Bottom Skirt) NFA-1010-12D


Pattern

Unit: cm

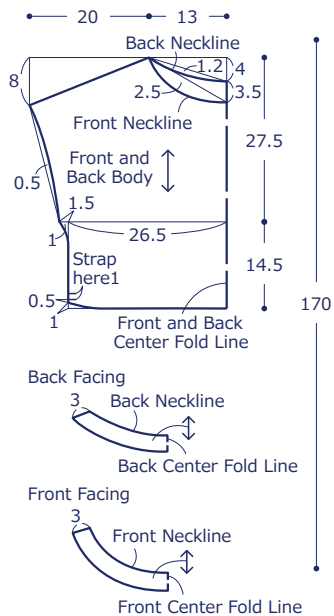

Cutting Layout

() denotes seam allowance. 1cm unless otherwise specified.
Adhere fusible interfacing on the back of the facing.

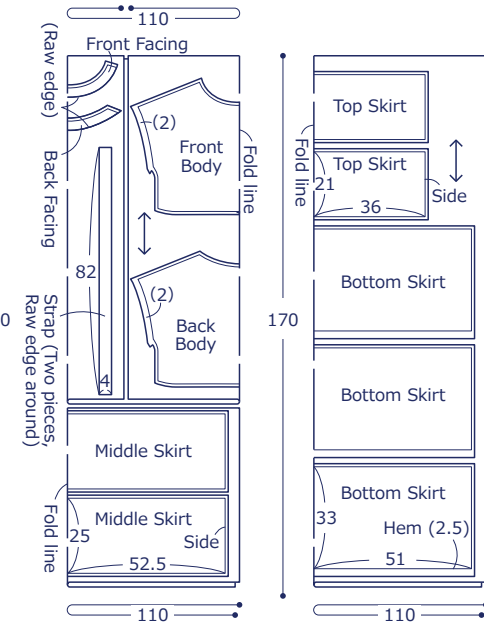

Instructions Front Side - (FrS), Reverse Side (RvS)

- ① With the front sides facing each other, sew together the front and back facings at the shoulder. Press down the seam to the front side.
- ② Apply zigzag stitches on the outer end of the fabric.
- ③ With the front sides facing each other, sew together the body and facing.
- ④ Make a notch on the seam.
- ⑤ Turn the facing over to the lining side of the body. Iron to align the shape and apply stitches.
- ⑥ With the front sides facing each other, sew together the two pieces of the top, middle and bottom skirts together respectively at the sides. Apply zigzag stitches on the seam and press it down to the front (top skirt) and to the back (middle skirt). As in ⑥②, apply rough stitches on the top end seam.
- ⑦ Fold the seam of the hem in three and sew.
- ⑧ Pull the thread at the top end of the skirt. With the front sides facing each other sew together each parts. Apply zigzag stitches on the seam and press it down to the upper side. Apply stitches.
- ⑨ With the front sides facing each other, sew together three pieces of skirts respectively. Apply zigzag stitches on the seam and press it down. (Either direction is fine)

① Make the strap. (RvS) 1.5, 1.3

② Make the facing and attach. (FrS) 0.2

③ Place the strap in between and sew both sides. (FrS) 0.2

④ Fold the seam of the armhole in three and sew. (RvS) 0.8, 1

⑤ Make two pieces. (FrS) 1, 1

⑥ Make the bottom skirt. (FrS) 0.2

⑦ Conceal the seam with blind stitches. (RvS) 0.2

⑧ Apply two lines of rough stitches on the top end seam of the front and back. (FrS) 0.5, 0.3

⑨ Apply zigzag stitches on the seam and press it down to the back side. (FrS) 0.2