

Flap Shoulder Bag with Chan

Design & Work: Kokka Fabric

Size: about 20cm (I) about 30cm (w) about 8cm (d)

Materials

□ Outer Fabric: about 110cm wide x 50cm □ Lining Fabric: about 110cm wide x 40cm

□ Fusible Interfacing (medium weight): about 110cm wide x 40cm

☐ Magnetic Hook: about 15mm wide x One pair

☐ Tape: about 20mm wide x 70cm


□ Ring: about 15mm inner diameter x Two pieces □ Chain: about 32mm x about 42mm Six pieces

Fabric and Notions shown for this sample: (Right) Fabric: YK-530-1C (Mustard) Chain: LGLK-1G, Ring: LGLK-4A (Left) Fabric: YK-530-1G (Gray)

Chain: LGLK-1E, Ring: LGLK-4C

Pattern and Cutting Layout

Unit: cm All raw edge. Add 1cm seam allowance when cutting the fabric.

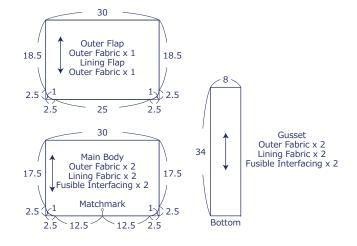

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Instructions Front Side - (FrS), Reverse Side (RvS) 1. Attach magnetic hook on the lining flap and outer main body 5. Baste the flap on the main body Outer main body Baste at 0.5cm (FrS) Tape (62cm) Outer Main Body Lining flap Lining flap (FrS) Outer gusset (FrS) (FrS) Outer main body 8cm → 3cm (RvS) Center Magnetic hook Center Magnetic hook (凹) (凸) 2. Sew the flap 6. Sew together the outer and lining main bodies With the front sides facing Turn it over and apply stitches. each other, sew together. With the front sides facing each other, sew together at the top opening. Lining flap (FrS) Lining flap (RvS) Sew at 1cm. Outer flap Outer flap (RvS) (FrS) Lining main body Outer main body (RvS) (RvS) 0.2cm wide stitch Cut a slit on the curved seam Turn it over and apply Lining flap 3. Sew the gusset stitches around the opening. (FrS) Outer gusset (FrS) With the front sides Sew at 1cm. Press facing each other. Outer gusset the seam open. 0.2cmsew the bottom. (RvS) *Repeat the same process wide stitch Lining main body for the lining gusset. Bottom (FrS) Outer main body (FrS) Baste the tape on the outer gusset. 0 Baste at 0.5cm Baste at 0.5cm Outer gusset (FrS) Outer gusset (FrS) *Close the opening for turning. 7. Attach the ring on the tape. Connect the chain to finish Tape - cut to 62cm Tape - cut to 8cm. Fold in half 4. With the front sides facing each other, 0.2cm Fold the end of sew together the main body and gusset wide the tape stitch (62cm) in three. Sew at 1cm. Sew at 1cm. Apply stitches and ÎÎ⊳Fold\ Press the seam open Press the seam open attach the ring. 1cm 3cm Tape (62cm) Outer Lining gusset Chain gusset (RvS) (RvS) 6 pieces Leave an opening Outer main body Outer main body Ringfor turning (FrS) (RvS) Lining main body Lining main body (about 12cm) (FrS) (RvS) Outer flap Matchmark Matchmark (FrS) Align the seam joint of the gusset and matchmark. Outer main body-

(FrS)

Cut a slit on the curved seam of the main body.