Bag Set (Shiba Inu)

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Bag Set (Shiba Inu)

Design & work: Kokka Fabric

Size: Bag - about 24cm (I)/about 37cm (w) / about 8cm (d) (handles excluded)

Pouch - about 13cm (I) /about 13cm (w)/

about 3cm (d) (shoulder strap excluded)

Materials


- □ Fabric A: about 110cm wide x 50cm
- □ Fabric B: about 110cm wide x 80cm
- □ Fusible Quilt Batting: about 90cm wide x 60cm
- ☐ Bias Binding Tape:
- about 11mm wide x 50cm

- □ Tape: about 45mm wide x 110cm
- □ Zipper: 20cm x One piece
- □ Waxed Cord/String:
- about 5mm wide x 130cm


Fabric shown for this sample: (Fabric A: YPA-31000-2A, Fabric B: HA-3020-1A

Pattern and Cutting Layout

Unit: cm Numbers in [] denote seam allowance. Add 1cm seam allowance when cutting the fabric unless specified otherwise.

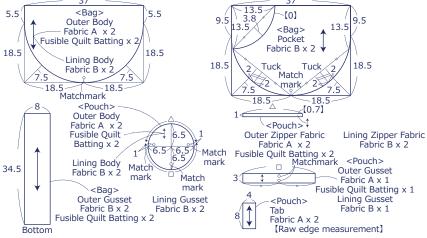

*Adhere fusible guilt batting on the back of the bag outer body and outer gusset. pouch outer body, outer zipper fabric and outer gusset.

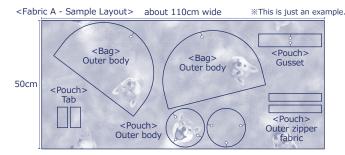

1. Wrap the top opening of the pocket with bias

binding tape and apply stitches.

Instructions Front Side - (FrS), Reverse Side (RvS)

Bias binding tape Pocket (FrS) (FrS) 0.2cm wide stitch

 Repeat the same process on the other piece.


2. Fold the tuck on the pocket and baste



3. Fold the center of the tape in half and apply stitches




4. Baste the pocket and tape to bag outer body

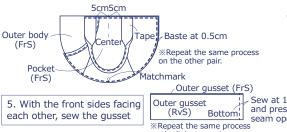

6. With the front sides facing each other,

Sew at 1cm and press the seam open. on the lining ausset.

sew together the body and gusset Sew at 1cm and press Sew at 1cm and press Lining body (FrS) Outer body (FrS) the seam open.

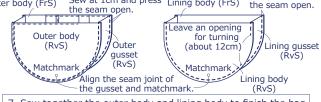

7. Sew together the outer body and lining body to finish the bag

With the front sides facing each other, Turn it inside out and apply stitches around the opening. sew together at the bag opening. 0.5cm Outer body (RvS) Sew at 1cm ☐ wide stitch Lining body 6 (FrS) Lining body **Pocket** (RvS) (FrS) Outer body for turning.

8. Sew together the zipper fabric and zipper

Baste the zipper on outer zipper fabric.



Layer with lining zipper fabric and sew.



Turn it inside out and apply stitches. Baste the outer and lining zipper fabrics.




9. Sew together the zipper fabric and gusset





10. Make the tab and baste on the body





11. Sew together the body and gusset. Insert the waxed cord to finish the pouch

With the front sides facing each other, sew together the body and gusset. Leave the zipper open.

Turn it inside out. Insert the waxed cord through the tab.

