



Drawstring Tote Bag

Design & work: Usanko Channel

Size: 29cm (l) 40cm (w-opening side)
28cm (bottom) 12cm (d)



Materials

- Fabric (Outer Fabric, Handle): 110cm wide x 50cm
(Lining Fabric, Pocket, Cord): 110cm wide x 50cm
- Fusible Interfacing: 90cm x 40cm

Fabric shown for this sample: (Outer Fabric, Handle) EGXA-8006-1A
(Lining Fabric, Pocket, Cord) EGXA-8005-2A

Pattern and Cutting Layout

Unit: cm All raw edge Adhere fusible interfacing on the back of the outer fabrics.

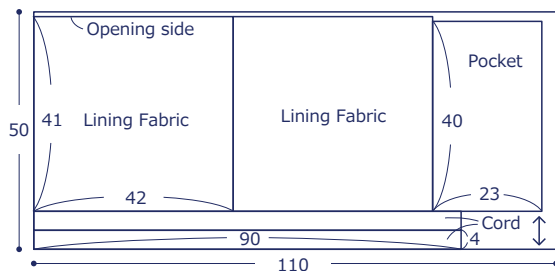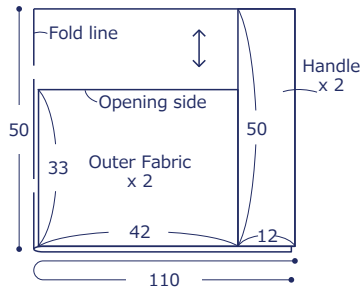

have fun with KOKKA fabric! produced by KOKKA

kokka-fabric.com

The craft projects and works featured in kokka-fabric.com are strictly for personal use and enjoyment. Please refrain from selling handmade items using the same exact design (including the pieces made in different fabrics) featured in kokka-fabric.com.

Instructions Front Side - (FrS), Reverse Side (RvS)

- ### 1. Make the cord

① Fold both ends.
(RvS)
(FrS)
0.2

② With the front sides facing outside, fold in four and sew.
1

• Make two pieces.
- ### 2. Make the handle

(RvS)
(FrS)
0.2
3

① With the front sides facing outside, fold in four and sew.
1

• Make two pieces.
- ### 3. Make the pocket

② Baste it to the outer fabric.
0.5
10
Opening side
Handle
Outer fabric (FrS)

③ Turn it inside out and apply stitches around pocket opening.
0.2
(FrS)

① With the front sides facing each other, fold in half and sew.
(FrS)
Pocket opening
Opening for turning 10
1

② Cut off corner seam.
- ### 4. Sew together the outer and lining fabrics

② Cut off corner seam.
1

① With the front sides facing each other, sew together the outer and lining fabrics at the top opening.
Outer fabric (RvS)
Lining fabric (FrS)

• Repeat the same process on the other side.
- ### 5. Sew the gusset

(RvS)
Side
Bottom
12

① Fold the bottom corner into a triangle and sew.
1

(RvS)
Side
Bottom
1

② Fold both sides. Stich over the stitch line from ①.
• Repeat the same process on all four locations.
- ### 6. Finish the bag

③ Insert the cord alternately and tie the end.
4
Cord
Cord
Lining fabric (FrS)
Outer fabric (FrS)

② With the front sides facing outside, put together the outer and lining bags and stitch along the cord opening.

④ Apply stitches on the outer side of the stitch line from ①.
0.5
1
Lining fabric (RvS)
Outer fabric (RvS)

⑤ Cut off the seam.

① Turn it inside out and close the opening for turning.